


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

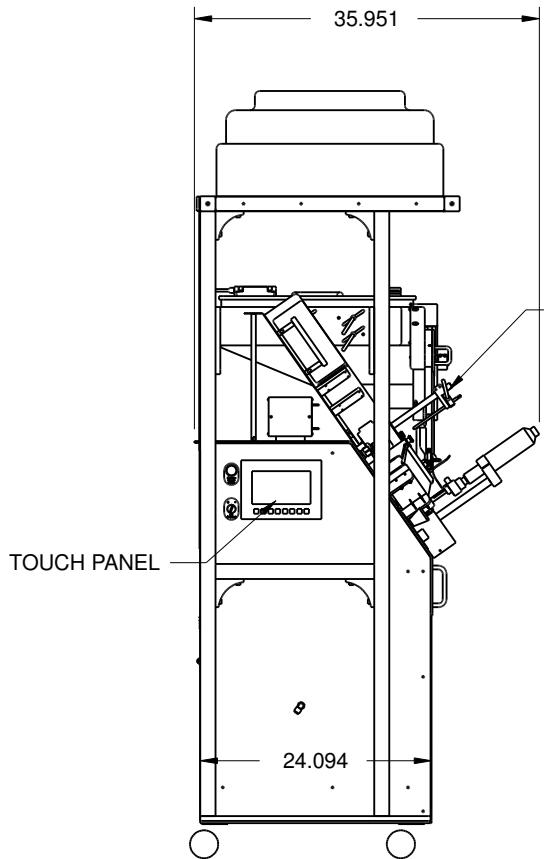

OPTIONAL HEPA FILTER/ENCLOSURE
WITH SOFT CURTAINS
POLYCARBONATE PANELS AS OPTION

ADJUSTABLE HEIGHT NOZZLE

79.929

68.966

56.788

40.959

FINISHED PRODUCT

RUN / STOP / E-STOP CONTROLS

TUBE LOADING HOPPER
WITH AGITATOR

50.700

58.187

OPTIONAL AUTOMATIC CAP FEEDER
OR MANUAL CAP LOADING CHUTE

AUTOMATIC CAP STARTER

EASY CHANGE STARWHEEL

PNEUMATIC CAP TORQUER
EASILY ADJUSTABLE
TORQUE SETTING

37.795

FEATURES:

- 2700 UPH DEPENDING ON PARAMETERS AND OPTIONS
- RUN MULTIPLE PRODUCTS WITH TOOL-LESS CHANGE PARTS KITS
- CONTROLLABLE CYCLE TIME
- AUTOMATIC TUBE/VIAL FEEDER
- FULLY ADJUSTABLE FILLING VOLUME AND SPEED
- PERISTALTIC PUMP
- AUTOMATIC CAP PLACEMENT AND STARTING
- AUTOMATIC CAP TIGHTENING
- TOUCH SCREEN PARAMETER CONTROL
- PLC CONTROL
- CE CERTIFICATION / UL OPTIONS
- HEPA ENCLOSURE OPTION SHOWN, AVAILABLE AS STAND-ALONE
- PORTABLE CASTER MOUNTED MACHINE
- CLEAN CABINET STYLE STAINLESS MACHINE BODY

MANY MORE OPTIONS AVAILABLE

- DIVING NOZZLE
- GAS FLUSH/PURGE
- ADDITIVE PUMP
- ELECTRONIC TORQUE
- LABELING
- AUTOMATIC CAP FEEDER
- ADDITIONAL LIGHTING
- CUSTOM CONFIGURATIONS

SERVICES

120/240VAC 8A/4A SINGLE PHASE ELECTRICAL
80psi 3cfm COMPRESSED AIR TYPICAL MAX

EXPECTED PRODUCTION RATES

1000-2000 MANUAL CAP FEED - OPERATOR DEPENDENT
2700 WITH AUTOMATIC CAP FEEDER

MODEL mTRX	<i>IQ Designs</i> Manistique, MI USA			
DATE 04.28.2020				
DRAWN BY DMG	SIZE A	NAME mTRX WITH ENCLOSURE AND CAP FEEDER	DWG NO. TRX-000-0003	REV -
MATERIAL XXX	SCALE 1:20	TOLERANCE X.XXX +/-0.005"	SHEET 1 OF 1	